



PCT/GB 2003 / 0 0 3 6 4 1




INVESTOR IN PEOPLE

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office  
Concept House  
Cardiff Road  
Newport

South Wales  
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Stephen Hordley*

Dated 25 September 2003

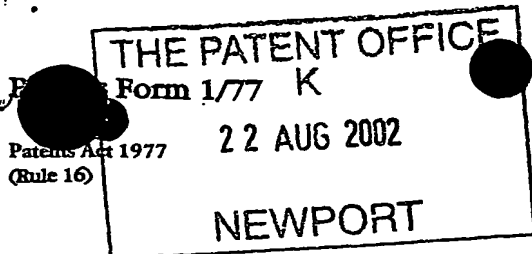

22AUG02 1742958-1 069640  
P01/7700 0.00-0219577.4

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

22 AUG 2002

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

IB/jar/FBDC

2. Patent application number

(The Patent Office will fill in this part)

0219577.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Susan Nicola Pieterse  
c/o Food Business Development Consultancy  
68 Park Street  
St Albans  
Hertfordshire (GB) AL2 2PW

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

8450975001

4. Title of the invention

A PRODUCT PACK

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

i.p.21 Limited  
Norwich Research Park  
Colney  
NORWICH NR4 7UT

Patents ADP number (if you know it)

8060758001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0 ✓

Description

8

Claim(s)

1 ✓

Abstract

0

Drawing(s)

6 + 6 *rw*

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(*please specify*)

1.

I/We request the grant of a patent on the basis of this application.

Signature *ip21 limited by IB* Date

21/08/02

2. Name and daytime telephone number of person to contact in the United Kingdom

IAN BISHOP

01603 457008

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.

Write your answers in capital letters using black ink or you may type them.

If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

If you have answered 'Yes' Patents Form 7/77 will need to be filed.

Once you have filled in the form you must remember to sign and date it.

For details of the fee and ways to pay please contact the Patent Office.

## A PRODUCT PACK

### Field of the Invention

The present invention relates to product packs which when in use are adapted to house a combination of liquid and solid elements, and particularly those which are destined for use in ovens.

### 5     Background to the Invention

While the pack of the present invention, is envisaged to have a wide variety of fields of application, the starting point for this invention may be conventional packs for food products suitable for cooking in a conventional oven, microwave oven or combination oven. In this context, the conventional cooking process is a multi-stage process. The first stage of the process often involves the raw food product being placed in an oven on a metallic or cardboard carrier tray. Trays adapted for use in ovens are widely available in today's market place, and one such pack has been defined and described in US Patent Application 5411204 and

10

may be used as a reference for prior art. After the first stage of placing the raw food in the oven on its corresponding tray and once the cooking process is complete, the food is usually removed from the oven and placed in sale or distribution packaging. In this type of cooking process, different containers are  
5 often used during the cooking phase and for sale or distribution purposes. Consequently, it is often required to double handle the products. Apart from this disadvantage of conventional systems, the cooking process frequently generates an undesirable amount of liquid such as grease or fat which is unsightly to the end users.

10 As this conventional cooking process is often present at food services where food is provided alongside non-food goods, this multi-stage cooking process is also undesirable due to the stringent demands on hygiene that often accompany these types of services.

One of the objectives of the present invention is to provide a pack for containing  
15 raw products initially, which can then be used at the point of sale or distribution and subsequently used to cook the products.

A further objective of the present invention is to provide a pack which can facilitate a one stage cooking process.

A further objective of the present invention is to provide a pack which can be used  
20 in microwaves, conventional ovens and combined ovens.

The present invention also aims to provide means that enable the unsightly and undesirable cooking process liquids to be absorbed away from the food and by so doing achieving a dry product.

### Summary of the Invention

In its broadest aspect, the invention presents a product pack which when in use is adapted to house a combination of liquid and solid elements and which is designed to facilitate the separation of said elements by part of the pack being so  
5 constructed as to segregate and absorb a substantial portion of the liquid without any undue external leakage so that said part and its liquid can subsequently be discarded as waste.

This configuration has the advantage of enabling not just the absorption of unwanted liquid but also its separation into a segregated (i.e. compartmented part  
10 of the pack). This particular construction provides a particularly hygienic pack whilst presenting its contents in an aesthetical and desirable form.

In a subsidiary aspect, the pack comprises one or more porous membranes inside the pack through which, in use, the liquid passes to be subsequently absorbed.

The second configuration of features is particularly advantageous as it improves  
15 the degree to which the liquids are separated from the remaining contents of the pack. Therefore, this configuration even further improves the achievable hygiene of the pack and the presentation of its contents, as it also can visually separate the liquid and its absorbing means from the viewed product.

In a further subsidiary aspect, the pack material is ovenable. Suitable materials,  
20 as such, are known; but the advantages given by the invention are only appreciated fully when this non-obvious combination is made.

The advantages discussed with reference to the above aspects are particularly applicable when the pack material is ovenable as it does away with the common requirement of a multi-stage cooking process. Since the liquids absorbed are

generally at elevated temperatures, the present inventive pack considerably reduces the risk of the pack's operator inadvertently burning himself whether during the cooking process or during consumption of the goods contained in the pack.

5     Brief Description of the Drawings

Figure 1 shows a cross-sectional view of a pack according to the first embodiment of the present invention.

Figure 2 shows a plan view of the pack according to the first embodiment of the present invention.

10    Figure 3 shows a cross-sectional view of a pack in accordance with a second embodiment of the present invention.

Figure 4 presents a cross-sectional view of a third embodiment.

Figure 5 shows a cross-sectional view of a pack in accordance with a fourth embodiment.

15    Figure 6A shows a perspective view of the membrane in accordance with a further embodiment.

Figure 6B shows the cross-section of one perforation of the membrane in accordance with a further embodiment.

20    Figure 6C shows a cross-section about a perforation according to a further embodiment of the invention.

Figure 6D shows a perspective view of a portion of the membrane with one perforation according to a further embodiment of the invention.

Figure 6E shows a schematic cross-sectional view of a membrane according to a further embodiment of the invention.

5     Detailed Description of the Drawings

Figure 1 shows a pack referenced 1 which when viewed in cross-section has a general trapezoidal form. Pack 1 incorporates two end walls such as that referenced and viewed in the drawing at 2 and two side walls 3 and 4. These walls form a container which may be sufficient in dimensions to receive raw food  
10     and be inserted in cooking appliances for processing.

A membrane 5 incorporating a number of perforations 7 divides the pack into two chambers one destined to receive the food or any other article for packaging and the other incorporating a cellulose fibre pad 6. The person skilled in the art will utilise a given geometry of the pad for any particular packaging application. In  
15     order to do so, he will take into account the viscosities of the liquids whose absorption into the pad is required.

In its primary application, the pack is envisaged for use at oven temperatures as well as in microwave conditions. An appropriate ovenable cardboard tray and a cellulose fibre pad will be selected amongst known alternatives. The cardboard  
20     itself will advantageously incorporate an impermeable coating to prevent any liquid escaping through the pack's wall. The invention also envisages that the material used for the membrane will be identical to that used for the pack's walls.

While cardboard and cellulose fibres are preferred materials, the invention is not limited to these and extends to other suitable materials such as metals or plastics.



Although not illustrated in this drawing, the pack will include a lid which may be retained to the containing walls of the pack by known means such as a heat seal or by folding.

Figure 2 displays the plan view of the pack shown in cross-section in Figure 1.

5 Identical reference numerals have been used for clarity. One of the aspects that becomes apparent in Figure 2 is how the perforations 7 are placed about the membrane 5. A central portion of the membrane incorporates no perforations at all, whilst the majority of the perforations follow a rectangular pattern generally in the vicinity of the walls. These perforations are circular in plan view and have a  
10 generally constant diameter along their depth. The membrane is affixed to the walls of the pack by ears 8 and 9 which may simply rest against the walls or be sealed thereto.

Figure 3 shows a further pack generally referenced 10 which is trapezoidal in cross-section and comprises a membrane 11 with circular perforations 12 and an  
15 absorbent pad 13. In this configuration the ears 14 and 15 of membrane 11 are folded back and in effect become a double wall between the liquid absorbed in the pad 13 and its neighbouring environment. Pack 10 is provided with a lid 16 which hinges about extremity 17. The free extremity 18 of lid 16 may be sealed to the outer surface of the pack or in mating engagement in any other form known  
20 in the art.

Figure 4 shows a pack 19 with a split hinged lid whose halves are numbered 20 and 21 and may be joined at their free extremities by any known means. The pack 19 incorporates a membrane 22 and a cellulose fibre absorbing pad 23, the membrane 22 being perforated at a variety of locations such as perforation 24.

25 The previous embodiments have all illustrated packs with absorbing means in their base portion. Figure 5 however shows a pack 25 destined to stand on its lid 26 during the cooking process so that its membrane 27 allows the passage of

unwanted liquids from the food chamber 28 to the absorbent pad 29. It is envisaged that the properties of the absorbent pad 29 will be selected by the person skilled in the art to sufficiently retain any liquid entering into contact with the pad while the pack stands on its lid and then retains the liquid within the lid when the pack stands on its conventional base 30 (for example during delivery of the pack).

Figure 6A illustrates a membrane 31 destined to separate consumable products of the pack from an absorbent pad (not illustrated in the drawing). Membrane 31 has the particularity of incorporating a single rectangular and elongate perforation 32 and a projection 44 resulting from the perforation process which extends inwards so as to create an additional barrier for any undesirable passage of fluid back to the containing chamber. Membrane 31 may be mounted into a pack so as to form a slope along which the liquid may run for enhanced passage through perforation 32 or a similar perforation, located about the edge of the membrane or at the lowest point of the membrane's slope.

Figure 6B shows the perforation 33 destined to ameliorate the passage of liquid in the direction of the arrow illustrated. Portions 34 and 35 were part of the wall of the membrane prior to the perforation process. The perforation process used in this embodiment has the particularity of being a two step perforation process, the first step being the perforation of perforation 33 into two portions 34 and 35 and the second step consisting of folding the free extremities of these portions, preferably at three quarters of their depth so as to form a venturi which enhances the circulation of fluid in the arrow's direction while making a flow in the opposite direction extremely difficult.

Figure 6C illustrates a perforation 36 through the membrane 37 which is in the shape of a double cone or conic with its neck being at three quarters of the depth of the membrane in order to improve the flow of liquid in the arrow's direction while as was the case in Figure 6B rendering a counter flow almost impossible.

In effect, this double cone shape promotes (as with Figure 6B) a venture-like flow of liquid into the absorbent pad, whilst imposing the reverse fluid dynamics effect on any attempted back-flow. If the pack is disorientated – for example in “take-home” situations from a fast flow outlet – this is especially advantageous.

- 5 Figure 6D illustrates a perforation 38 with a projection 39 extending from the membrane 40 towards the containing chamber (not illustrated in this drawing). Projection 39 is envisaged to be designed sufficiently rigid, when in use, to separate the contents of the pack from the rest of the membrane 40. This projection will also facilitate the localisation of the contents of the pack. By  
10 separating to a certain degree the contents of the pack and being able to localise them precisely, the separation of undesirable fluids is enhanced and any undesirable adhesion of the contents of the pack to the membrane is thought to be limited.

- Figure 6E shows the cross-section of the membrane 41 which defines an arc with  
15 perforations 42 and 43 at its extremities. The slope of the arc will of course accelerate the circulation of unwanted liquids to absorbing means which may in this case only be located below perforations 42 and 43. This latest option will reduce the required amount of pad necessary for absorbing the undesirable liquid contents of the pack.

- 20 Whilst the advantages of this kind of pack become particularly apparent in the context of packs used in ovens that combine microwave and conventional heat, these pads are thought to be able to have other applications such as absorbing water residue resulting from de-freezing and even absorbing machining by-products around mechanical components.

CLAIMS

1. A product pack which when in use is adapted to house a combination of liquid and solid elements and which is designed to facilitate the separation of said elements by part of the pack being so constructed as to segregate and absorb a  
5 substantial portion of the liquid without any undue external leakage so that said part and its liquid can subsequently be discarded as waste.
2. A pack according to claim 1, the pack comprising one or more porous membranes inside the pack through which, in use, the liquid passes to be subsequently absorbed.
- 10 3. A pack according to claim 1 or claim 2, wherein the pack material is ovenable.
4. A pack substantially described with reference to and as illustrated in any appropriate combination of the accompanying text and drawings.

1/6

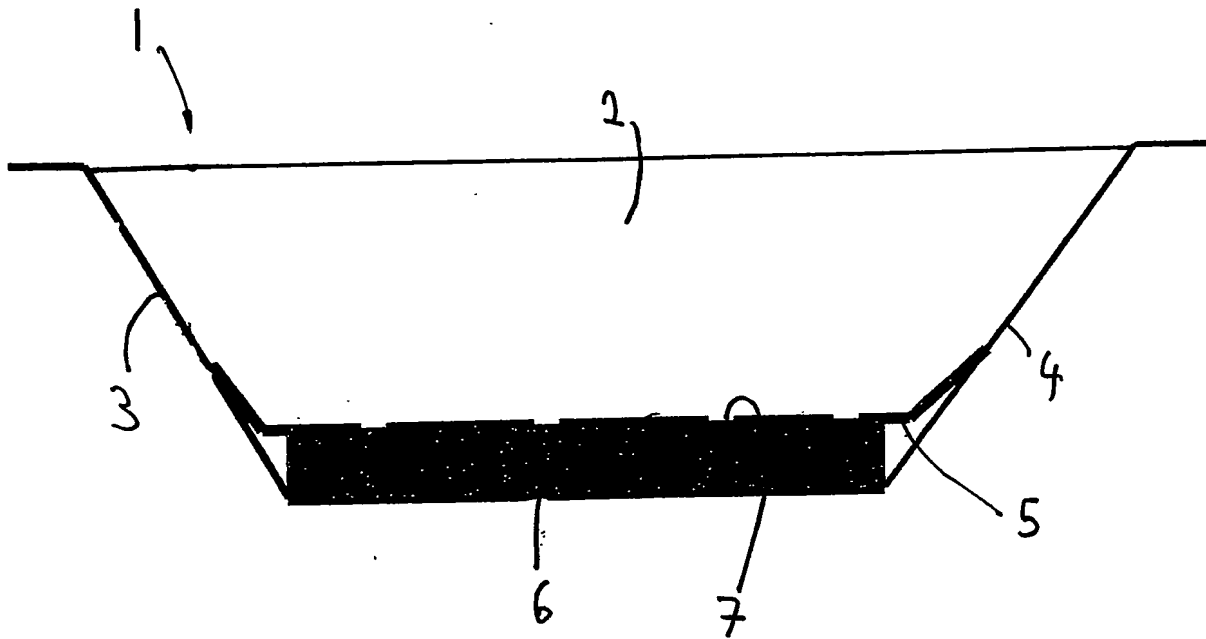


FIGURE 1

FIGURE 2

3/6

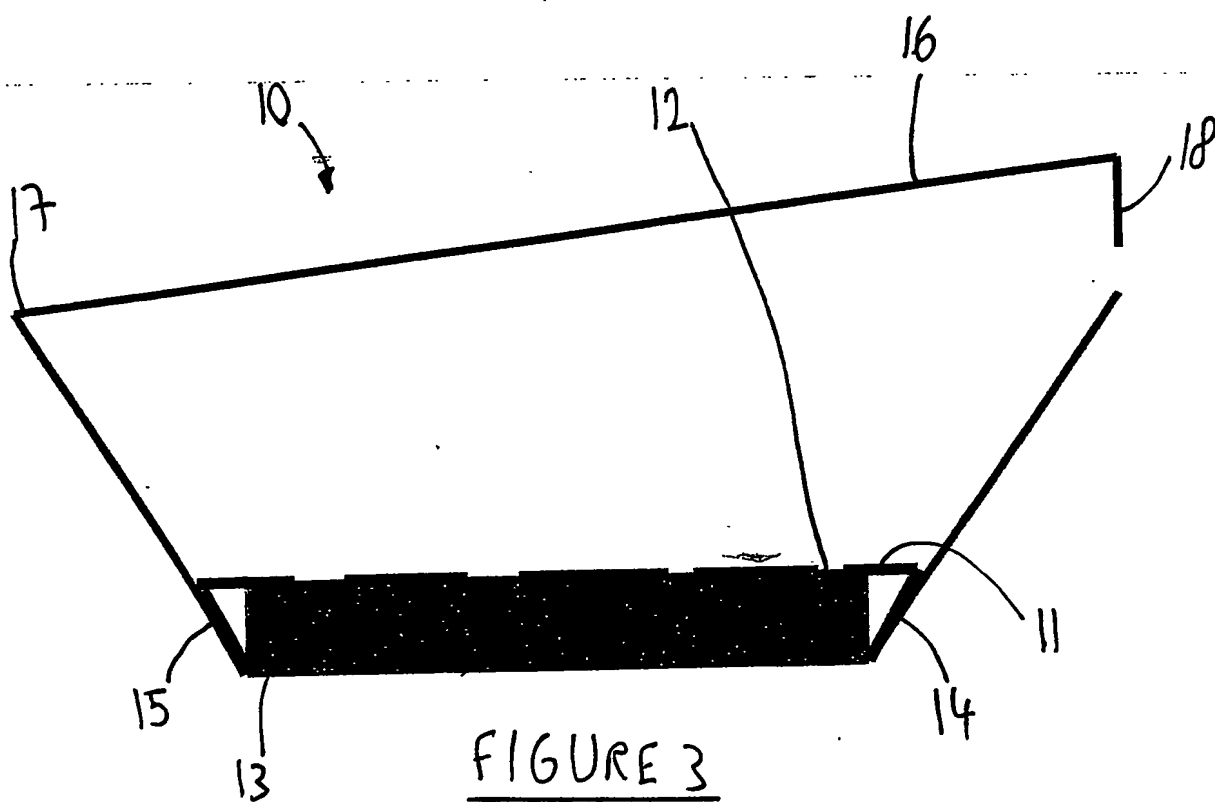


FIGURE 3

4/6

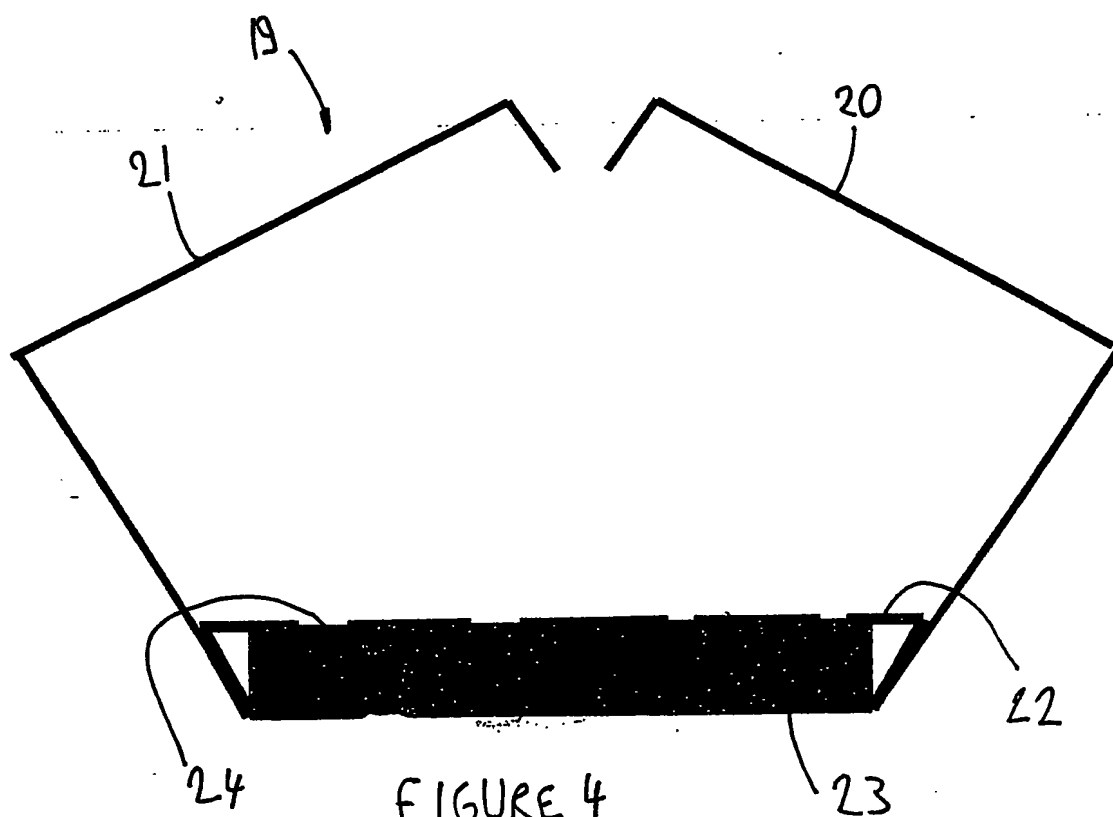


FIGURE 4



5/6






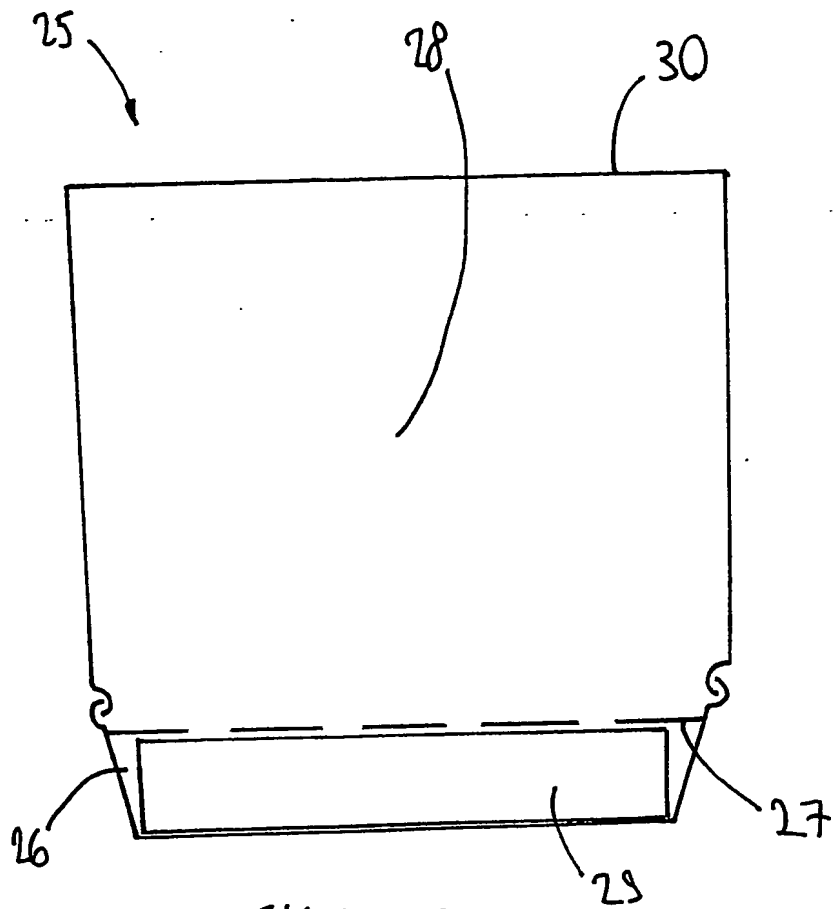


FIGURE 5

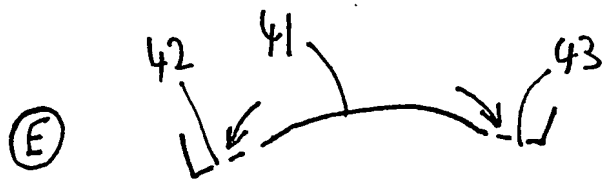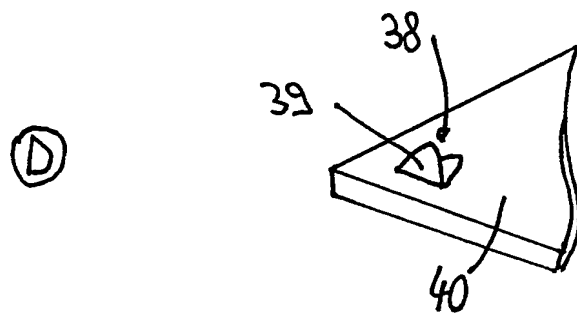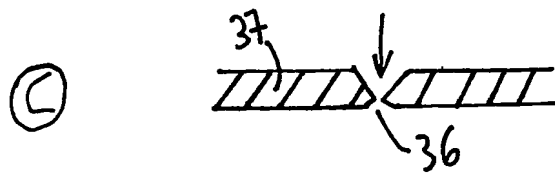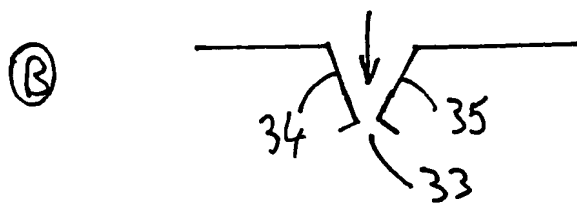

FIGURES 6

PCT Application  
**GB0303641**

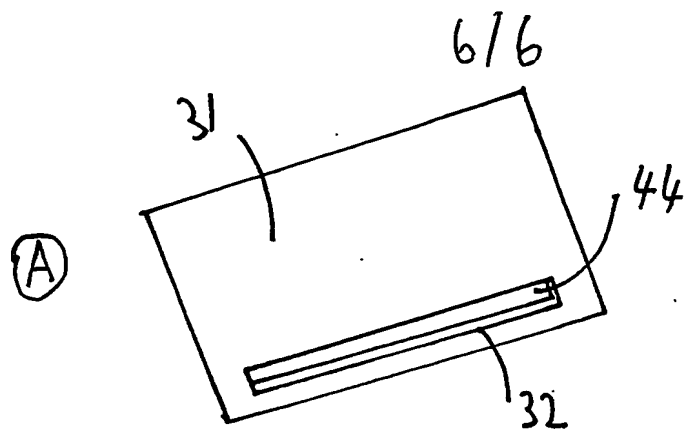